





# LP Series-General Purpose LP12-120(12V120Ah)

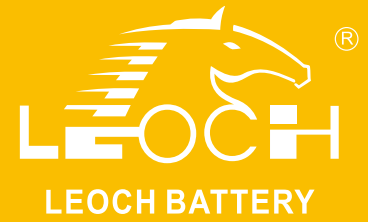


## Specifications

Rated Voltage	12V	
Nominal Capacity	120.0Ah	(C <sub>10</sub> , 1.80V/cell)
Dimension	Length	408±2mm (16.1 inches)
	Width	177±2mm (6.97 inches)
	Container Height	225±2mm (8.86 inches)
	Total Height	225±2mm (8.86 inches)
Approx Weight	35.0 Kg (77.2 lbs)	
Terminal	M8	
Container Material	ABS	
Rated Capacity (25°C)	123.4 Ah	(20hr, 6.17A, 1.80V/cell)
	120.0 Ah	(10hr, 12.0A, 1.80V/cell)
	107.0 Ah	(5hr, 21.4A, 1.75V/cell)
	97.5 Ah	(3hr, 32.5A, 1.75V/cell)
	75.0 Ah	(1hr, 75.0A, 1.60V/cell)
Max. Discharge Current	1200A (5s)	
Internal Resistance (25°C)	Approx 4.0mΩ	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	-20 ~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 36.0A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
	Initial Charging Current less than 36.0A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LP series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

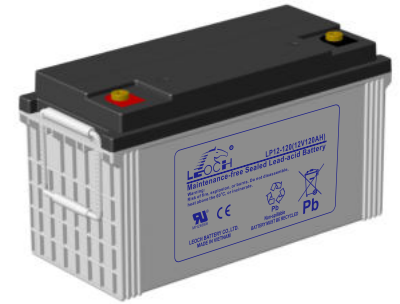

## Layout

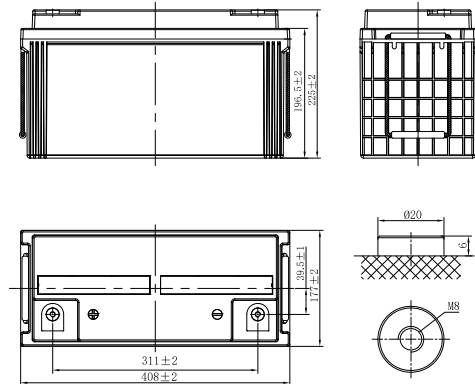

## Constant Current Discharge (Amperes) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	234.7	166.9	150.8	118.6	106.1	77.5	65.7	47.6	40.0	29.4	23.0	20.0	17.6	13.6	11.2	5.96
1.80V/cell	266.9	189.4	170.9	134.1	115.5	82.1	68.1	49.2	41.3	31.9	24.6	21.0	18.9	14.3	12.0	6.17
1.75V/cell	289.9	205.4	185.1	144.8	117.8	85.1	71.4	51.8	43.5	32.5	25.1	21.4	19.1	14.3	12.1	6.24
1.70V/cell	309.9	219.0	196.5	153.5	120.2	86.8	72.8	52.8	44.4	33.1	25.5	21.8	19.2	14.6	12.2	6.30
1.67V/cell	320.8	226.0	202.3	157.7	122.0	88.1	73.9	53.6	45.0	33.4	25.9	22.2	19.3	14.8	12.3	6.38
1.60V/cell	332.1	233.7	208.6	161.8	123.7	89.3	75.0	54.3	45.7	33.7	26.2	22.5	19.4	14.9	12.4	6.45

## Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	438.3	313.9	285.6	225.6	202.7	149.0	127.1	92.4	77.9	57.4	45.2	39.4	34.8	26.9	22.3	11.9
1.80V/cell	490.3	351.2	319.5	252.4	218.9	156.8	130.9	95.0	80.0	62.0	48.1	41.2	37.2	28.2	23.4	12.3
1.75V/cell	523.3	374.8	341.0	269.4	221.7	161.5	136.7	99.4	83.9	63.0	48.8	41.8	37.4	28.3	23.6	12.4
1.70V/cell	550.1	394.0	358.5	283.2	224.2	163.6	138.7	101.0	85.2	64.0	49.5	42.4	37.5	28.7	23.8	12.5
1.67V/cell	559.1	400.4	364.3	287.8	225.8	165.1	140.0	101.9	86.1	64.3	50.1	43.1	37.6	29.0	24.0	12.6
1.60V/cell	566.9	406.0	369.4	291.8	226.8	165.9	141.0	102.7	86.8	64.6	50.4	43.5	37.7	29.3	24.3	12.8



# LP Series-General Purpose LP12-120(12V120Ah)

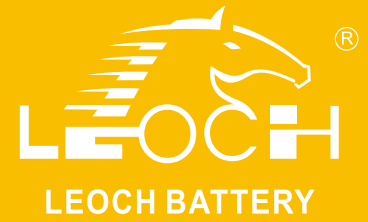

## Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system


## General Features

- 8 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate


## Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in Leoch®IATF 16949, ISO45001, ISO 9001 and ISO 14001 certified production facilities


## Discharge Characteristics

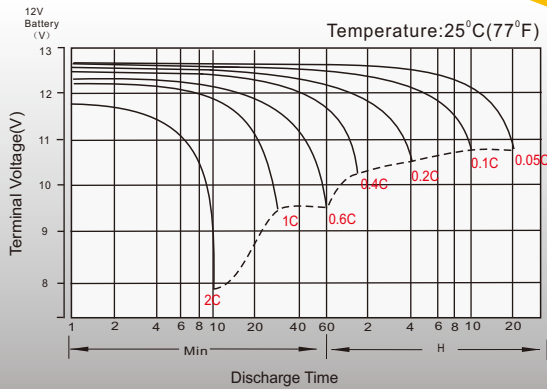


## Float Charging Characteristics

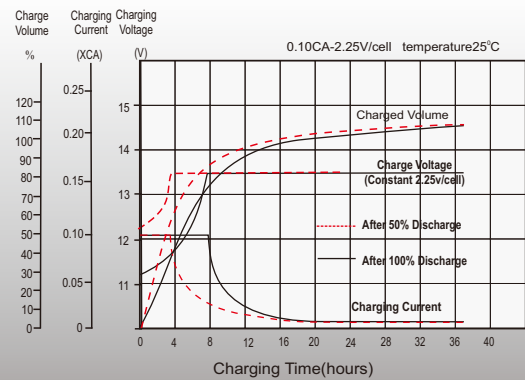

## Temperature Effects in Relation to Battery Capacity

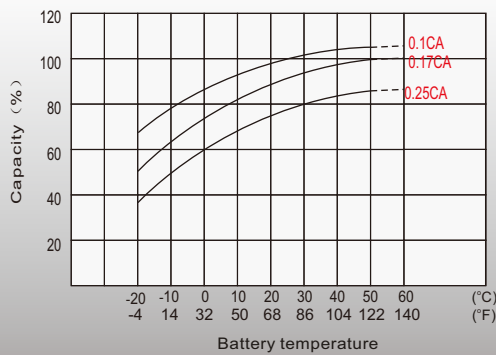

## Float Service Life

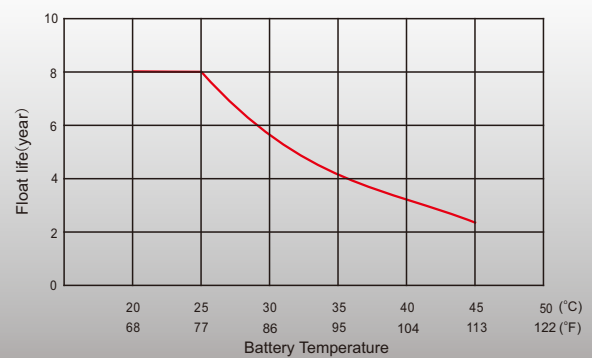

## Sales Offices Worldwide

### China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Tel: +86-755-26067269  
E-mail: export@leoch.com

### HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,  
Tsuen Wan, New Territories, Hong Kong  
Tel: +852 35786666  
Tel: +44(0) 1452 729428 / 1452 729696  
E-mail: sales.hk@leoch.com

### Singapore Sales Office

No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68636078  
Tel: +65 6863 6079  
Email: sales.sg@Leoch.com

### Australia Sales Office

2 /29 Tarlington Place, Smithfield, NSW 2164  
Australia  
Tel: 02 9756 0950  
E-mail: sales.au@leoch.com

### North America Sales Office

19751 Descartes  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Tel: 949-588-5966  
E-mail: sales@leoch.us  
Http:// www.leoch.us

### UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,  
Gloucester, GL2-2AQ, UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Tel: +44 1452 690125  
E-mail: Sales.Europe@leoch.com  
Http:// www.leoch.eu

### EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,  
Greece  
Tel: +30 210 5760318 (2 lines)  
Tel: +30 210 5760318 (2 lines)  
E-mail: support\_EMEA@leoch.com  
Http:// www.leoch.eu

### India Sales Office

Shed no.A-53(b), 2nd Stage of Peenya Industrial Area,  
Bangalore North Taluk, Bangalore-560058, India  
Tel: +91-80-23440018/23440019  
Tel: +91-80-23440017  
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

© 2020 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.  
Subject to revisions without prior notice.

Publication No.: LB-LP12-120-PD-EN-V2.0-202004