


# XP SERIES-ULTRA HIGH RATE

## XP12-490 (12V490W)

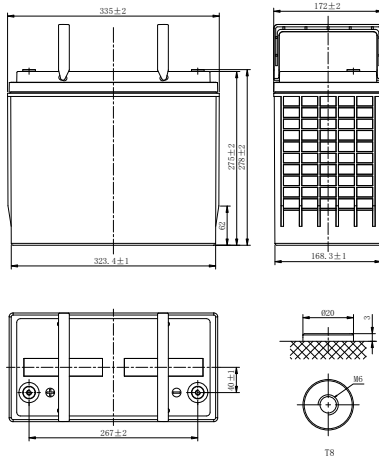

### CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Rate (25°C)	$W_{15}, 1.67V/cell$	490W/cell
Nominal Capacity (25°C)	$C_{20}, 1.80V/cell$	142Ah
Dimension	Length	335mm (13.2inches)
	Width	172mm (6.77inches)
	Container Height	275mm (10.8inches)
	Total Height	278mm (10.9inches)
Approx Weight	42.6kg (93.9lbs)	
Terminal	T8(M6)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	3264A	
Internal Resistance (25°C)	Approx 3.8 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.25C	
Charge voltage (25°C)	Standby Use	Equalization Use
	2.25-2.30V/cell	2.30-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	-4mV/cell/°C
	40°C (104°F)	106%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
	Self Discharge	≤3% per month at 25°C (77°F)

### DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)															
F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	261.7	220.7	194.8	168.9	134.5	103.1	82.1	48.4	35.1	28.0	23.4	20.2	16.0	13.3	6.93
1.80V/cell	310.5	248.5	216.5	183.6	144.4	109.9	87.2	50.6	36.7	28.9	24.1	20.8	16.4	13.6	7.10
1.75V/cell	355.0	282.6	237.2	196.8	152.2	115.5	91.7	52.5	38.0	29.9	24.8	21.4	16.8	13.8	7.26
1.70V/cell	391.7	303.6	253.1	208.7	159.8	120.9	95.6	54.7	38.9	30.5	25.4	21.8	17.1	14.0	7.38
1.67V/cell	426.0	326.6	270.7	220.4	168.3	126.5	99.4	56.6	40.1	31.4	25.9	22.2	17.4	14.2	7.51
1.60V/cell	463.5	354.8	287.3	232.3	176.4	131.3	103.0	58.1	41.1	32.1	26.6	22.7	17.7	14.5	7.63
Constant Power Discharge (Watts/cell) at 25°C (77°F)															
F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	497.8	424.6	377.4	329.0	263.7	203.4	162.9	96.6	70.3	56.2	47.3	41.1	32.7	27.3	14.3
1.80V/cell	583.6	474.1	415.6	355.1	280.9	215.0	171.7	100.2	72.9	57.7	48.3	41.8	33.3	27.7	14.6
1.75V/cell	661.2	532.2	451.5	377.7	293.7	224.2	179.2	103.3	75.0	59.3	49.5	42.9	33.9	28.0	14.8
1.70V/cell	722.4	566.4	476.7	397.6	306.2	233.0	185.4	106.7	76.5	60.3	50.4	43.4	34.3	28.3	15.0
1.67V/cell	777.5	602.9	505.7	416.4	320.5	242.5	191.8	109.9	78.2	61.7	51.1	44.1	34.5	28.6	15.1
1.60V/cell	829.6	641.4	527.2	429.8	329.2	247.0	195.1	110.8	78.8	61.9	51.5	44.3	34.6	28.5	15.2

# XP SERIES-ULTRA HIGH RATE

## XP12-490 (12V490W)



### APPLICATIONS

- UPS
- Hospitals and Testing Laboratories
- Emergency Power Supply
- Electric starting
- Telecommunications
- Data Centers


### GENERAL FEATURES

- 12 years design life (25°C)
- Excellent high current performance - optimised for short discharge time
- Advanced AGM technology for superior high-rate power
- Long Life Alloy - minimizing grid growth, reducing gassing and extending battery life
- Epoxy-sealed posts eliminate leaks
- Optimal energy density - saves floor space


### STANDARDS

- Compliance with IEC 60896 standards
- Classified as "Long Life" according to Eurobat
- CE,UL Approved
- Manufactured in Leoch@IATF 16949, ISO 45001,ISO 9001 and ISO 14001 certified production facilities


#### Discharge Characteristics

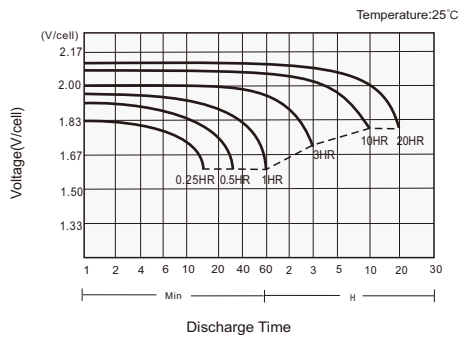

#### Charging Characteristics

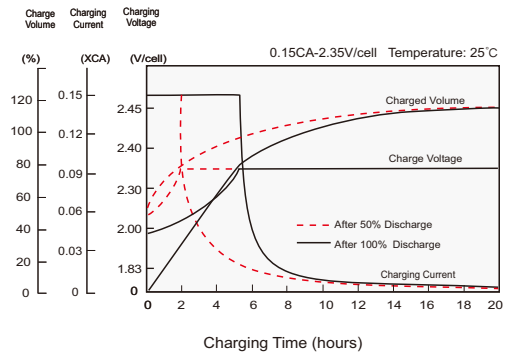

#### Effects of Temperature on Capacity

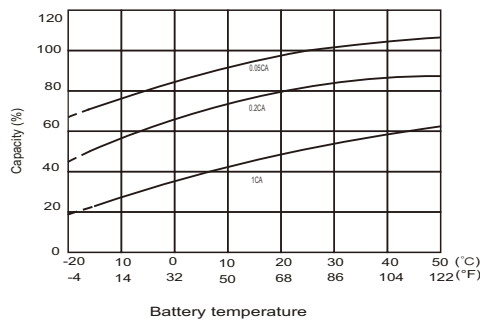

#### Self Discharge Characteristics

