

# LEOCH DU115V100(115.2V100Ah)

## DU115V100



LEOCH provides safe and efficient LFP battery solutions.

LEOCH DU system uses lithium iron phosphate battery cells, which can be applied in the field of DC screen backup power. It adopts self-developed battery cells and is an emergency backup solution for 60 minutes or more.


### Characteristic

- Safe, reliable, and long-life
- Flexible design, modular structure, scalable
- Gapless power supply
- Can communicate with DC screens or monitoring systems, compatible with multiple protocols
- Standard human-machine interface HMI
- Lithium iron phosphate battery cell with high energy conversion efficiency and long service life

### System Installation Rendering



### PACK Diagram

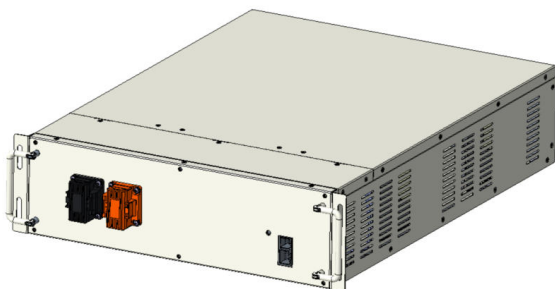

### System Specifications

Nominal Voltage	115.2V
Nominal Capacity	100Ah
Voltage Range	100.8V~124.2V
Cell Specification	3.2V/100Ah
Series/Parallel configuration	1P36S
Energy	11.52KWh
Nominal Power	11.52KW
Max. Output Power	11.52KW
Backup Time	≥60mins
Single cluster configuration	3 Battery PACK
Pack Dimensions (W*D*H)	450*442*130mm
System Dimensions (W*D*H)	800*600*2260mm
Weight	Approx.285kg
Communication	RS485/CAN/Dry Contact
Cycle life	3500 cycle
Working Humidity	5%~95%R.H.
Thermal Management	Natural Cooling
Operation Temperature	Discharge at -10 °C~60 °C Charge at 0 °C~55 °C Storage at 5 °C~ 35 °C
Altitude	Over 2500 meters, special instructions required
IP Grade	IP20